


PRESSURA™ Model 8631-HC LonWorks Object

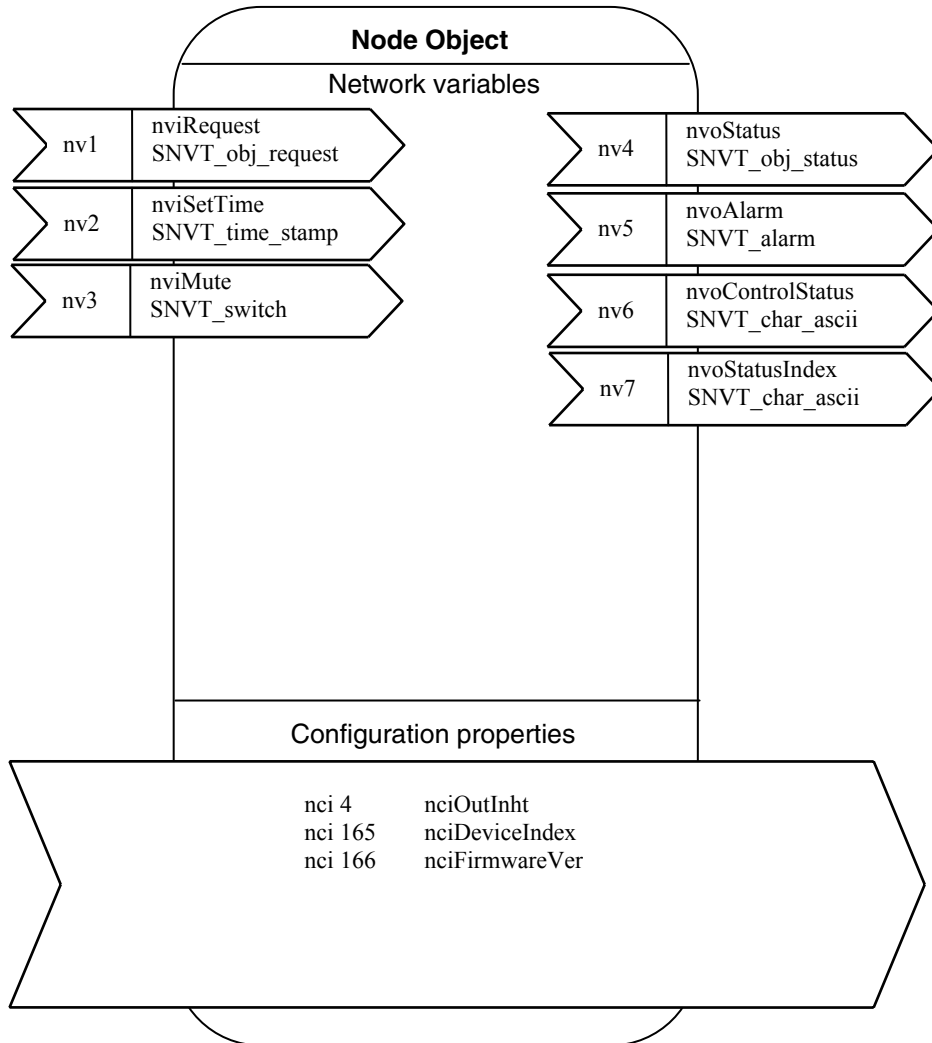

LonWorks Room Controller Status Definitions


nvoControlStatus

Bit	Description
0	Negative Mode
1	Positive Mode
2	No Isolation Mode

Setting nviRequest.object_request to RQ_CLEAR_ALM clears the current alarm from the controller and the BAS

nvoStatusIndex

Bit	Description
0	Normal
1	Low Alarm
2	High Alarm
3	Minimum Exhaust Alarm
4	Second Sensor Low Alarm
5	Second Sensor High Alarm
6	Data Error
7	Emergency
8	LON Override

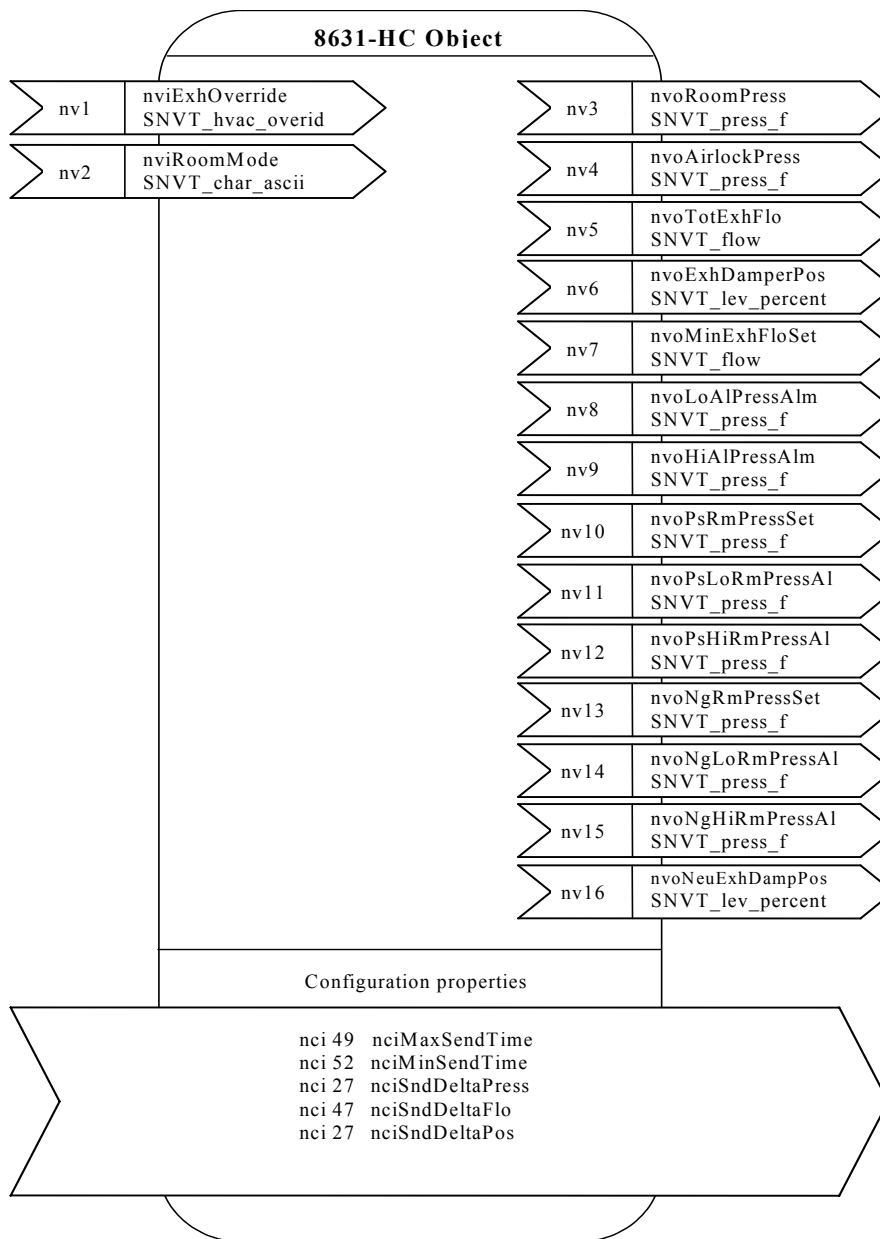

LonWorks Room Controller Room Mode Definition

nviRoomMode

Bit	Description
0	Negative Mode
1	Positive Mode
2	No Isolation Mode



TSI Incorporated

500 Cardigan Road
 Shoreview, MN 55126 U.S.A.
 Tel: 651 490 2811
 800 874 2811
 Fax: 651 490 3824
 E-mail: answers@tsi.com