# PRIMARY CALIBRATORS MODELS 4046 AND 4146

ROUTINE CALIBRATION FOR ASSURED ACCURACY

Personal sampling pumps are key tools for exposure assessment. The accuracy sampling of the pumps depends on how much air passes through the sampling media as well as good laboratory analysis. As a common practice, sampling pumps should be calibrated before and rechecked after sampling using a calibration device.




TSI offers two Primary Calibrator Models for calibrating pumps and any other air sampling instruments that draw an active air sample. These small, portable, battery-operated units are lightweight and easy to use. Volumetric flow rate is displayed continuously, making real-time pump adjustment, calibration and periodic flow checks fast and easy. These Primary Calibrators are temperature-compensated and pressure-corrected to calculate volumetric flow rate at an accuracy within 2% of reading.

Primary calibrator kits are available with a soft-sided carrying case, battery pack, tubing, user guide and NIST-traceable calibration certificate.

### **Features and Benefits**

- + Provides continuous real-time volumetric flow rate readings, so pump adjustment and calibration is fast and easy
- + Battery powered, compact and lightweight
- + Field portable–use the same primary calibrator for adjustment, calibration and periodic checks
- + Comes with a NIST traceable calibration certificate
- + Kits come complete and are ready to use



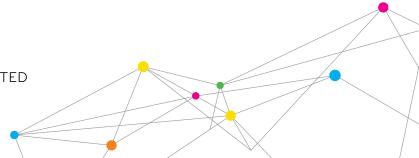

# **SPECIFICATIONS**

# PRIMARY CALIBRATORS MODELS 4046 AND 4146

## **Flow Measurement Range**

Model 4146 0.01 to 20 lpm Model 4046 2.5 to 300 lpm

Accuracy

 $\begin{array}{ll} \mbox{Model 4146} & \pm 2\% \mbox{ or 0.005 std. lpm, whichever is greater} \\ \mbox{Model 4046} & \pm 2\% \mbox{ or 0.05 std. lpm, whichever is greater} \\ \end{array}$ 

Dimensions  $(H \times W \times D)$ 

Model 4146 5 in. x 2 in. x 1.25 in. (12.7 cm x 5 cm x 3.2 cm) Model 4046 7.2 in. x 2.5 in. x 2.1 in. (18.3 cm x 6.4 cm x 5.3 cm)

**Shipping Weight** 

Model 4146 2.2 lbs (1.0 kg) Model 4046 3.0 lbs (1.1 kg)

**Warm-up Time** 

1 min

**DC Power Input** 

 $7.5\,\text{VDC}\,\pm1.5\,\text{V}$ ,  $300\,\text{mA}\,\text{max}$ 

Specifications are subject to change without notice.

TSI and the TSI logo are registered trademarks of TSI Incorporated.



**TSI Incorporated** - Visit our website **www.tsi.com** for more information.

 USA
 Tel: +1800 874 2811
 India
 Tel: +9180 67877200

 UK
 Tel: +44149 4459200
 China
 Tel: +8610 8251 6588

 France
 Tel: +33 4 91 1187 64
 Singapore
 Tel: +65 6595 6388

 Germany
 Tel: +49 241 523030

P/N 2980455 Rev E (A4) ©2012 TSI Incorporated Printed in U.S.A.