

Model 3089 Nanometer Aerosol Sampler

Allows you to sample 2- to 100-nm particles onto TEM grids, AFM substrates, or glass slides

Now you can sample charged particles, typically from the output of a Differential Mobility Analyzer (DMA), onto sample substrates for analysis. The Model 3089 Nanometer Aerosol Sampler (NAS) allows you to control the spot size of the deposition using two electrode sizes to get a uniform deposition size that is optimal for your analysis system. For your convenience, the instrument contains a high-voltage negative power supply, pump, and LCD display. The NAS is optimized for use with a Model 3080N Electrostatic Classifier, which contains a Model 3085 Nano DMA.

Features

- Uniform particle deposition on substrate
- High collection efficiency of positive, singly charged particles in the range from 2 to 100 nanometers
- Flow and voltage adjustments
- Built-in pump and flowmeter

Applications

The successful use of the electrostatic precipitation method to sample aerosol has been documented in many publications. The NAS provides a convenient means of sampling charged aerosols onto substrates with control over the collection spot size using two sizes of electrodes, flow control, and voltage control. Known applications for this instrument include:

- Samples for electron microscopy (SEM/TEM)
- Samples for scanning microscopy (AFM/STM)
- Biomolecule sample preparation (PCR)
- Nano-material evaluation
- Air pollution sampling

Operation

The substrate is mounted on the sample electrode using adhesive tape. The electrode is installed inside the sampler and run at a fixed voltage. The electric field will focus charged particles from the inlet onto a portion of the substrate. The substrate can then be removed for further analysis.



Specifications

Model 3089 Nanometer Aerosol Sampler

Mode of Operation	Collection of single- or multi-charged particles using electrostatic precipitation onto a collection substrate
Particle Type	Solids or nonvolatile liquids
Particle Size Range	2 to 100 nm
Sample Electrode Size	9.5-mm (³ / ₈ -in.) or 25-mm (1-in.) diameter
Inlet Flow Rate	0.2 to 2.5 L/min (1 L/min nominal)
Voltage Range	-0.5 to -10 kV
Power Requirements	85 to 260 VAC, 50/60 Hz, 25 W maximum
Front-panel Displays	3.5-digit LED for voltage, 0.2 to 2.5 L/min flowmeter

Ports

Aerosol Inlet	1/4-in. OD aluminum tube
Pump Exhaust (Filtered)	1/4-in. OD Swagelok® connection


Dimensions (LWH)	20.3 cm × 25.6 cm × 22.8 cm (8.0 in. × 10.1 in. × 9.0 in.)
------------------	--

Weight	3.75 kg (8.25 lb)
--------	-------------------

Environmental Operating Conditions

Recommended Environment	Indoor use
Ambient Temperature	10 to 50°C
Ambient Humidity	0 to 90% RH, noncondensing

Specifications are subject to change without notice. TSI and the TSI logo are trademarks of TSI Incorporated. Swagelok is a trademark of the Crawford Fitting Company.

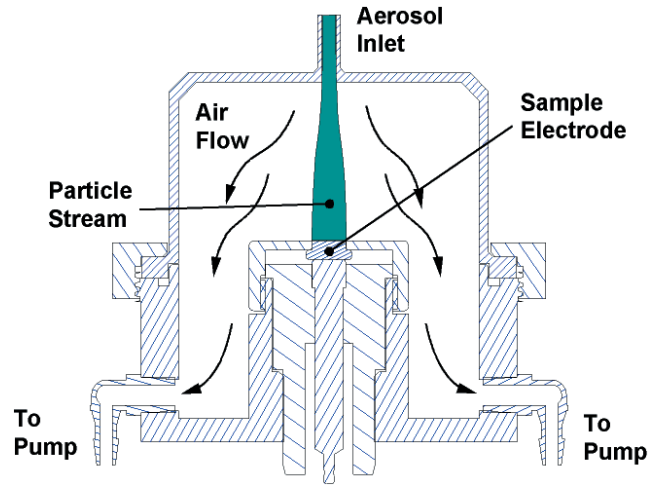

To Order

Nanometer Aerosol Sampler

Specify	Description
3089	NAS instrument and accessories

Bibliography

J. Dixkens and H. Fissan, Development of an Electrostatic Precipitator for Off-Line Particle Analysis, *Aerosol Science and Technology*, 30:438-453 (1999).



TSI Incorporated

500 Cardigan Road, Shoreview, MN 55126 U.S.A.
Tel: 651 490 2811 Toll Free: 1 800 874 2811 Fax: 651 490 3824 E-mail: particle@tsi.com

TSI Germany

Neuköllner Str. 4, 52068 Aachen, Germany
Tel: +49 241 523030 Fax: +49 241 5230349 E-mail: particle-europe@tsi.com

TSI United Kingdom

1 Beach Road West, Portishead, Bristol BS20 7HR, United Kingdom
Tel: +44 1275 847837 Fax: +44 1275 842437 E-mail: tsiuk@tsi.com

