

VPG-A6 IN-LINE PROCESS GAS FILTER

ULTRA-HIGH EFFICIENCY FILTRATION
DOWN TO 2nm AND BELOW

The industry leading VPG-A6 Vapor Process Gas filter is an ultra-low pressure drop, ultra-high efficiency in-line filter designed for vapor and process gas filtration. This patent-protected 316L SS filter is chemically- and thermally-resistant and provides up to 99.999999999% (twelve 9s) of efficiency at 2.5nm - an estimated particle penetration of less than one part per trillion (ppt). The extremely low pressure drop of this filter makes it easier to work in ultra-low pressure environments and reduces the risk of gas phase reactions occurring in the filter.




Conventional high-purity, point-of-use gas filters are used in a compressed gas line for particle removal. The VPG-A6 filter is also used downstream of a vaporizer under vacuum flow conditions to prevent particles, which could potentially be in the gas/vapor mixture, from entering the Chemical Vapor Deposition (CVD) or Atomic Layer Deposition (ALD) process chamber. Due to its unique design, the VPG-A6 filter has more thermal mass than competitive offerings, making it particularly well suited for use downstream of a vaporizer in a heated line - acting as almost a second stage heat exchanger.

Applications

- + Vapor process gas
- + Ultra-high purity gas
- + High temperature
- + Inert or reactive gases
- + High and ultra-high vacuum
- + Semiconductor manufacturing

Features and Benefits

- + 316 Stainless Steel
- + Ultra-high particle removal efficiency
- + Ultra-low pressure drop
- + Solid core - more thermal mass
- + ½" VCR fittings

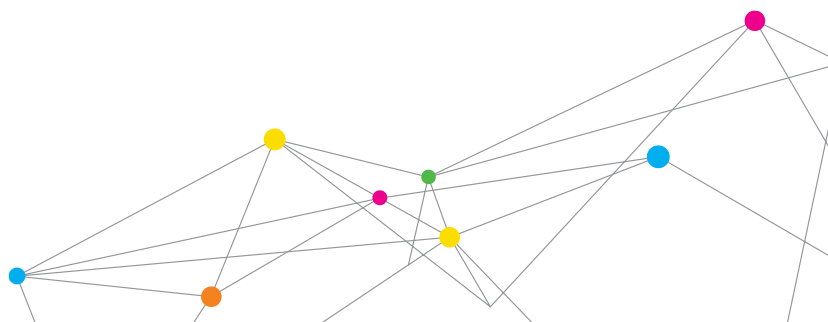


SPECIFICATIONS

VPG-A6 IN-LINE PROCESS GAS FILTER

Specifications		
Efficiency* @ 1 SLPM	2.5nm 10 nm 50 nm	99.9999999999% (twelve 9s) 99.99999999% (ten 9s) 99.9997% (five 9s)
Filter Media	Sintered 316L SS Fiber	
Wetted Materials	Stainless Steel 316L	
Temperature Range (°C)	<400 (inert gases)	
Max. Operating Pressure (psig)	2500	
Max. Differential Pressure (psid)	500	
Flow Rate Range (SLPM)	0-30	
Weight (kg/lb)	0.45/1	
Fittings**	½" male VCR with 7/8-14 thread	



*Filtration efficiency at atmospheric pressure
 **Alternative fitting options available by request

VPG-A6 Pressure Drop vs Flow Rate

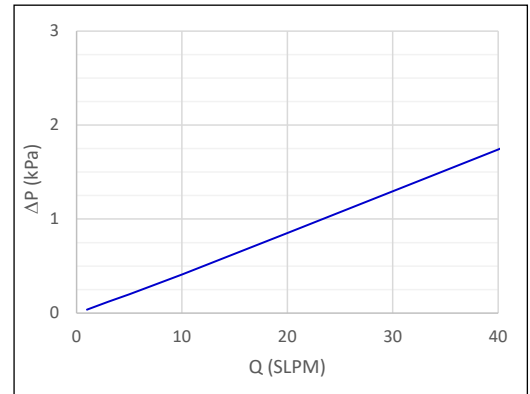

Industry Leading, Patent-protected Design

Cross-flow construction and short fiber 316L stainless steel media provide ultra-high efficiency with ultra-low pressure drop. Solid core provides more thermal mass for better performance downstream of a vaporizer.

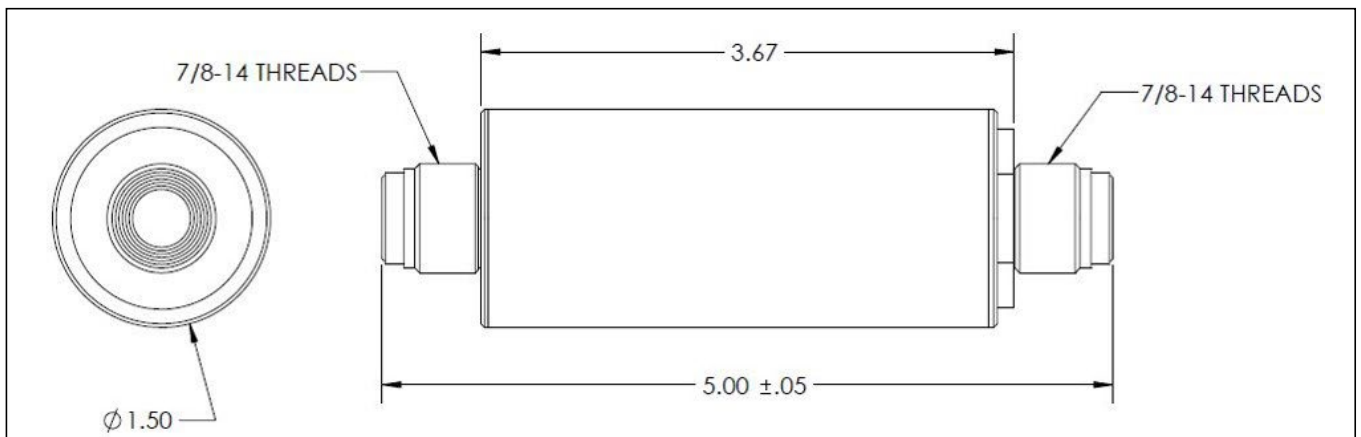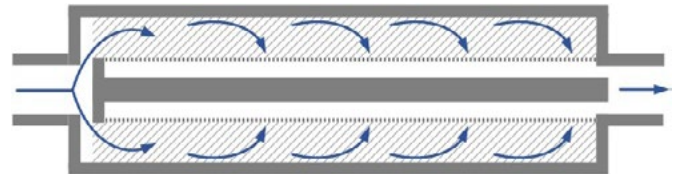

Specifications are subject to change without notice.

The MSP logo is a registered trademark of MSP Corporation. TSI and the TSI logo are registered trademarks of TSI Incorporated.



UNDERSTANDING, ACCELERATED

TSI Incorporated - Visit our website www.tsi.com for more information.

USA Tel: +1 800 874 2811
UK Tel: +44 149 4 459200
France Tel: +33 1 41 19 21 99
Germany Tel: +49 241 523030

India Tel: +91 80 67877200
China Tel: +86 10 8219 7688
Singapore Tel: +65 6595 6388